


ANCHORAGE

ARO BULL

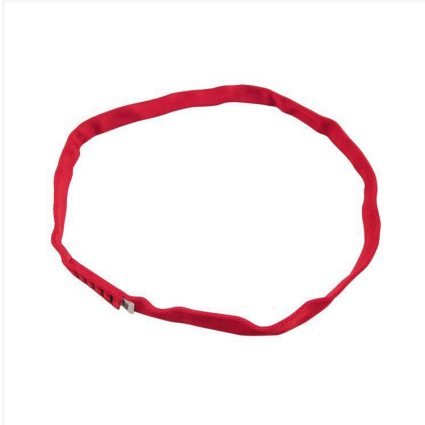

HIGH-LOAD TEXTILE ANCHORING LOOP

High-load textile anchoring loop, flexible and durable.

Available in various lengths, it is ideal for creating safe and versatile anchoring points. Each length is identified by a specific color, while the contrasting inner layer enables quick inspection, immediately highlighting any signs of wear.

Custom lengths are available upon request, in addition to standard sizes.

- **Certifications:** CE EN 795/B, EN 354, ANSI Z359.18
- **Material:** Polyamide
- **Maximum load:** 35 kN
- **Width:** 25 mm
- **Weight:** from 52 to 270 g, depending on the length

Lifetime and Inspections



2 + 10 YEARS



NFC READY

Usage activities

SCAFFOLDING AND TRESTELS

ROOF AND INCLINED PLANES

METAL STRUCTURES



ROPE ACCESS

TREECLIMBING / ARBORICULTURE

WIND TURBINES

WATER DANGER

ITEM CODES

Item	Standards	Material	 (g)	 (kN)	Size	Colour	A (mm)	Hole diameter (mm)	Notes
280A030NOKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	52	35	30	Black	30cm	/	
280A060NOKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	95	35	60	Black	60cm	/	
280A060ROKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	95	35	60	Red	60cm	/	
280A080NOKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	130	35	80	Black	80cm	/	
280A080YOKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	130	35	80	Yellow	80cm	/	
280A120NOKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	185	35	120	Black	120cm	/	
280A120ROKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	185	35	120	Red	120cm	/	
280A150NOKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	230	35	150	Black	150cm	/	
280A150YOKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	230	35	150	Yellow	150cm	/	
280A180NOKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	270	35	180	Black	180cm	/	
280A180ROKK	EN 795/B EN 354 EAC ANSI Z359.18	Polyamide	270	35	180	Red	180cm	/	

Copyright © KONG spa | P.IVA 00703180166

Via XXV Aprile, 4 23804 Monte Marenzo (LC) Italy | Tel. +39 0341 630506